

Description

The GM393 consists of four independent precision voltage comparators which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage. These comparators also have a unique characteristic. In that, the input commonmode voltage range includes ground, even though operated from a single power supply voltage.


Application areas include limit comparators, simple analog to digital converters; pulse, square wave and time delay generators; wide range VCO; MOS clock timers; multivibrators and high voltage digital logic gates. The GM339 are designed to directly interface with TTL and CMOS. When operated from both plus and minus power supplies, the GM339 will directly interface with MOS logic, where their low power drain is a distinct advantage over standard comparators.

The GM339 is available in DIP-8 and SOP-8 packages.

Features

- ♦ Single- supply Range: ±1.0V to ±18V
- Wide supply voltage range: ±2.0V to ±36V
- ♦ Very low supply current drain (0.4 mA) -
- independent of supply voltage
- ◆ Low input biasing current: 25 nA
- ♦ Low input offset current: ±5 nA
- Maximum offset voltage: ±3 mV
- Input common-mode voltage range includes ground
- Differential input voltage range equal to the power supply voltage
- Low output saturation voltage: 250 mV at 4 mA
- Output voltage compatible with TTL, DTL, ECL, MOS and CMOS logic systems

Connecting Diagram

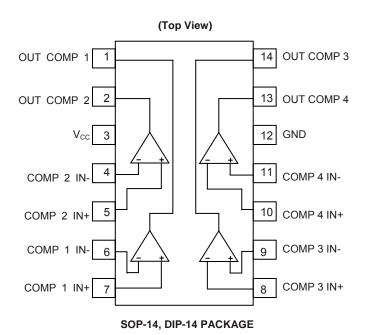




GM339

LOW POWER QUAD DIFFERENTIAL COMPARATOR

Marking Information and Pin Configurations (Top View)

SO14 and DIP14

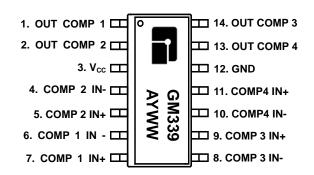

A: Assembly / Test site code

Y: Year WW: Week

Ordering Information

Ordering Number	Package	Shipping		
GM339D14T	DIP-14	25 Units / Tube		
GM339S14T	SO-14	50 Units / Tube		
GM339S14R	SO-14	2,500 Units / Tape & Reel		




LOW POWER QUAD DIFFERENTIAL COMPARATOR

Absolute Maximum Ratings

PARAMETER	RATINGS	UNITS	
Supply Voltage	±18 or 36	V	
Input Current	50	mA	
Input Voltage	-0.3 to +32	V	
Operating Temperature Range	-40 to 125	$^{\circ}\!\mathbb{C}$	
Storage Temperature	- 65 to 150	$^{\circ}\!\mathbb{C}$	
Lead Temperature (soldering 10 sec.)	260	$^{\circ}\!\mathbb{C}$	

Block Diagram

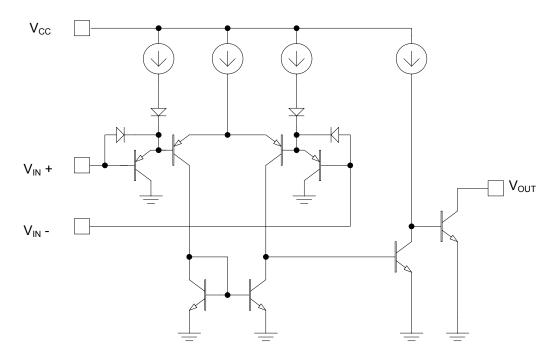



GM339

LOW POWER QUAD DIFFERENTIAL COMPARATOR

Electrical Characteristics ($V_{CC} = 5V$, at specified free-air temperature, unless otherwise specified)

Parameter	Symbol	Condition			Min	Тур	Max	Unit	
Input offset Voltage	V _{IO}	V_{CC} = 5V to Max V_{IC} = V_{ICR} min V_{O} = 1.4V		T _A = 25°C		±2	±5	mV	
				Full Range			9		
Input Offest Current	I _{IO}	V _O = 1.4V		T _A = 25°C		±5	±50	n 1	
				Full Range			±1 50	nA	
Input Bias Current	I _{IB}	V _O =1.4V		T _A = 25℃		-20	-250	- A	
				Full Range			400	nA	
Common-Mode Input Voltage Range**	V _{ICR}			T _A = 25℃	0 to V _{CC} -1.5V			V	
	V ICR			Full Range	0 to V _{CC} -2.0V				
Low-Level output Voltage	V _{OL}	I _{OL} = 4mA, V _{ID} = 1V		T _A = 25℃		150	400	mV	
				Full Range			700		
Large-Signal Differential Voltage Amplification	A _{VD}	V_{CC} = 15V, V_{O} = 1V to 11V R_{L} = 15K to V_{CC}		T _A = 25℃	50	200		V/mV	
High Level Output Current	I _{OH}	V _{OH} = 5V, V _{ID} = 1V		T _A = 25°C		0.1	50	nA	
		V _{OH} = 30V, V _{ID} = 1V		Full Range		1		μA	
Low Level Output Current	I _{OL}	V _{OH} = 1.5V, V _{ID} = -1V		T _A = 25°C	6			mA	
Supply Current	Icc	R _L = ∞, V _{CC} = 5V		T _A = 25°℃		0.8	1.0	mA	
		R _L = ∞, V _{CC} = 30V		Full Range			2.5		
Response Time (Note 1)	_	R _L Connected to 5V through 5.1k.	step	mV input with 5mV rdrive		1.3		μs	
		$C_L = 15pF$	TTL step	level input		0.3			


All characteristics are measured under open loop conditions with zero common-mode input voltage unless otherwise specified. "MAX" V_{CC} for testing purposes is 30V. Full range is 0°C to 70°C.

Note 1: C_L includes probe and jig capacitance. The response time specified is the interval between the input step function and the instant when the output crosses 1.4V.


^{**} The voltage at either input or common - mode should not be allowed to go negative by more than 0.3V. The upper end of the common - mode voltage range is V_{CC} - 1.5V, but either or both inputs can go to 30V without damage.




Typical Performance Characteristics

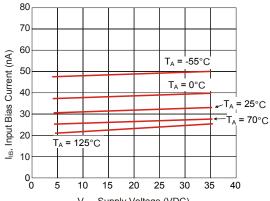

 $\begin{array}{c} V_{\text{CC}}, \, \text{Supply Voltage (VDC)} \\ \textbf{Figure 1. Input Bias Current versus Power} \\ \textbf{Supply Voltage} \end{array}$

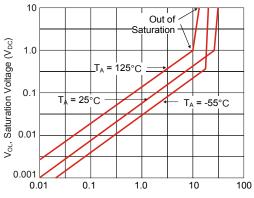

$$\begin{split} &I_{\text{SINK}}, \text{ Output Sink Current (mA)} \\ &\textbf{Figure 2. Output Saturation Voltage v.s.} \\ &\textbf{Output Sink Current} \end{split}$$

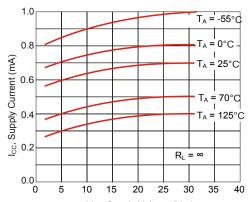


 $\begin{array}{c} V_{\text{CC}}, \, \text{Supply Voltage} \, (V_{\text{DC}}) \\ \text{Figure 3. Power Supply Current versus} \\ \text{Power Supply Voltage} \end{array}$








Package Outline Dimensions - SO 14

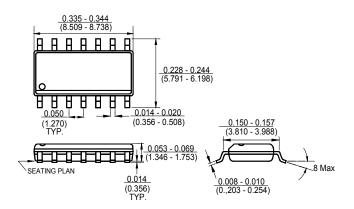

Package Outline Dimensions - DIP 14

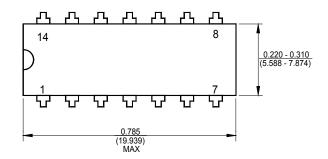

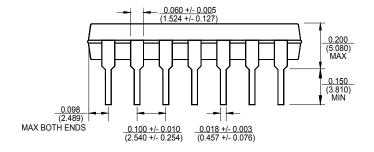







LOW POWER QUAD DIFFERENTIAL COMPARATOR

Ordering Number

GM 339 S14 R

APM Gamma Circuit Type

Micro

Package Type

S14: SO 14 D14: DIP 14 Shipping Type

R: Taping & Reel

T: Tube

Note:

Pb-free products:

- RoHS compliant and compatible with the current require-ments of IPC/JEDEC J-STD-020.
- Suitable for use in Pb-free soldering processes with 100% matte tin (Sn) plating.

Green products:

- ♦ Lead-free (RoHS compliant)
- ♦ Halogen free(Br or Cl does not exceed 900ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500ppm by weight)